
MATERIALS HANDLING

CBD15/18/20J-Li-S

Lithium Battery Powered Pallet Truck

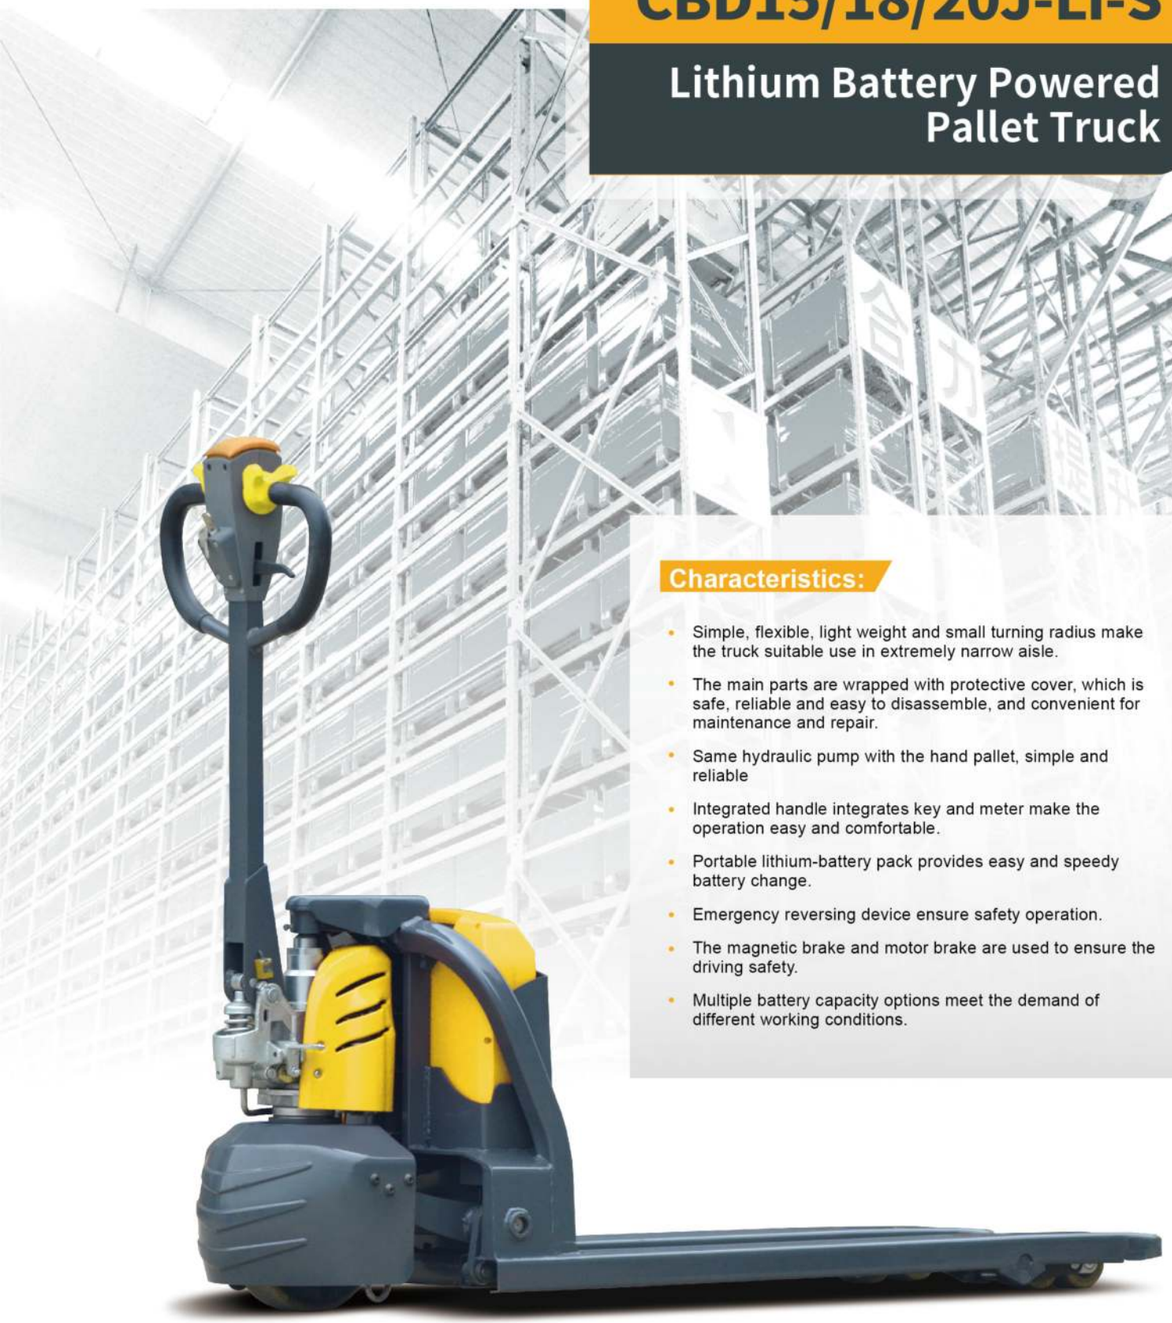


Characteristics:


- Simple, flexible, light weight and small turning radius make the truck suitable use in extremely narrow aisle.
- The main parts are wrapped with protective cover, which is safe, reliable and easy to disassemble, and convenient for maintenance and repair.
- Same hydraulic pump with the hand pallet, simple and reliable
- Integrated handle integrates key and meter make the operation easy and comfortable.
- Portable lithium-battery pack provides easy and speedy battery change.
- Emergency reversing device ensure safety operation.
- The magnetic brake and motor brake are used to ensure the driving safety.
- Multiple battery capacity options meet the demand of different working conditions.

milion GLOBAL TECHNOLOGY | CHL MATERIALS HANDLING

Manufacturer's Data and Design Characteristics

	Characteristics												
1.1	Manufacturer		CHL										
1.2	Model		CBD15J-Li-S				CBD18J-Li-S				CBD20J-Li-S		
1.3	operator type		Pedestrian propelled				Pedestrian propelled				Pedestrian propelled		
1.4	rated capacity	Q (kg)	1500				1500				2000		
1.5	lift height	h3 (mm)	200				200				200		
1.6	Service weight with battery	kg	142	144	146	149	142	144	146	149	146	149	
1.7	Load centre	c (mm)	600				600				600		
1.8	Axle centre to fork face	x (mm)	944				944				944		
1.9	Wheel base	y (mm)	1243				1243				1243		
1.10	Controller		CURTIS				CURTIS				CURTIS		
	Wheels												
2.1	Tyre type		Polyurethane				Polyurethane				Polyurethane		
2.2	Tyre size, driving wheels	Φ×w(mm)	Φ210×70				Φ210×70				Φ210×70		
2.3	Tyre size, loading wheels	Φ×w(mm)	Φ80×60				Φ80×60				Φ80×60		
2.4	Wheels, number front/rear (x = driven)		1x/4				1x/4				1x/4		
2.5	Track width, rear, loading side	b11 (mm)	400/535				400/535				400/535		
	Dimensions												
3.1	Overall length	l1 (mm)	1603				1603				1603		
3.2	Length to fork face	l2 (mm)	453				453				453		
3.3	Overall width	b1 (mm)	550/685				550/685				550/685		
3.4	Fork dimensions	s/e/l (mm)	50/150/1150				50/150/1150				50/150/1150		
3.5	Width of forks	b5 (mm)	550/685				550/685				550/685		
3.6	lowered height	h13 (mm)	85				85				85		
3.7	Min.Ground clearance	m2 (mm)	35				35				35		
3.8	height drawbar in driving position min. / max.	h14 (mm)	740/1160				740/1160				740/1160		
3.9	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	1804				1804				1804		
3.10	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	1854				1854				1854		
3.11	Min.Turning radius	Wa (mm)	1398				1398				1398		
	Performance												
4.1	Travel spees,with/without load	(km/h)	4.2/4.5				4.2/4.5				4.2/4.5		
4.2	Max. gradeability laden/unladen	(%)	5/10				5/10				5/10	5/10	
4.3	Service brake type		Electromagnetic brake				Electromagnetic brake				Electromagnetic brake		
	Drive and Battery												
5.1	Drive motor,output S2 60 min.	(kW)	0.75				0.75				0.75		
5.2	Lift motor rating at S3 15%	(kW)	0.8				0.8				0.8		
5.3	Battery according to DIN 43531/35/36 A,B,C,no		No				No				No		
5.4	Battery voltage/rated capacity	(V/Ah)	24/20	24/30	24/40	24/60	24/20	24/30	24/40	24/60	48/20	48/30	
5.5	Battery weight (± 5%)	(kg)	6	7.8	10.2	13.2	6	7.8	10.2	13.2	10.2	13.2	
5.6	charger specification		24V/10A				24V/10A				48V/5A		
	Others												
6.1	Type of drive control		DC				DC				DC		
6.2	sound pressure level at the driver's ear	dB(A)	≤70				≤70				≤70		
6.3	Steering type		Mechanical steering				Mechanical steering				Mechanical steering		

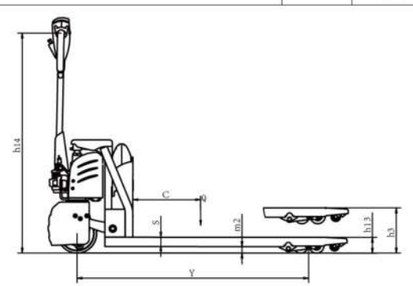

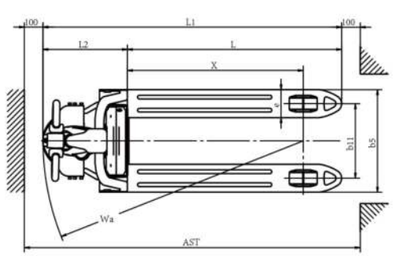

MANUFACTURER: ANHUI HELI CO., LTD.

ADD: NO.668 Fangxing Street,Economical Development Zone,Hefei,P.R.China

AUTHORIZED DEALER

MİLİON GLOBAL TEKNOLOJİ SANAYİ VE TİCARET A.Ş.

Adres: Selahaddin Eyyubi Mah. Uğur Mumcu Cd. Eşbah İnovasyon Vadisi Giriş Kat No: 114 Esenyurt / İstanbul

Tel: (0212) 671 78 52 E-posta: satis@milion.com.tr

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

Catalog No.200109 Fokeli Print