Optional item

	Model	
Basic items	Solid tyre	●
	No-marking solid tyre	○
	Two piece valve	●
	Three piece valve	○
	Standard forks	●
	Non standard forks and attachments	○
Safety items	Full set of OPS functions	●
	Safety protecting function of multiway valve overload	●
	Dry powder fire extinguisher (0.5kg)	○
	Dry powder fire extinguisher (2kg)	○
	Reverse buzzer	●
	Reverse Chinese voice speaker	○
	Central wide-angle rearview mirror	●
	Rearview mirrors on two sides and central wide-angle rearview mirror	○
	Start with key, and card swiping	○
	Key start	●
Comfort items	He' an seat	●
	Grammer seat	○
	Mechanical operated valve	●
	Fan	○
Lights	LED rear work light	○
	Front LED red/blue spotlight	○
	Rear LED red/blue spotlight	○
	Lateral and rear red/blue strip lights	○
	Fixed LED flashing warning lights	○
	Fixed LED rotary warning light	○
	Fixed LED rotating buzzer warning light	○
Others	HELI Lithium Battery	●
	CATL Lithium Battery	○
	EIKTO Lithium Battery	○
	HELI packaging	●
	Without HELI packaging	○
	Chinese plates	●
	English plates	○
	Customized special language plates	○

Note: "●" standard ; "○" optional ;

ANHUI HELI CO., LTD.

ADD:NO.668 Fangxing Street,Economical Development Zone,Hefei,P.R.China

milion GLOBAL TECHNOLOGY

MİLİON GLOBAL TEKNOLOJİ SANAYİ VE TİCARET A.Ş.

Adres: Selahaddin Eyyubi Mah. Uğur Mumcu Cd. Eşbah İnovasyon Vadisi Giriş Kat No: 114 Esenyurt / İstanbul

Tel: (0212) 671 78 52 E-posta: satis@milion.com.tr

ONLINE SHOP
Alışveriş için Okutun.

AUTHORIZED DEALER

* Our products are subject to improvements and changes without notice.

www.chlforklift.com

FE(H4)05 CHLN
Design&Print:Fokeli Printing 20250220

milion GLOBAL TECHNOLOGY | CHL MATERIALS HANDLING

EASE YOUR JOB

0.8-1.2t

Three Wheel Battery Powered Counterbalance Forklift Truck

CPD 08/10/12 SQ

A1H4 A5H4 A1LIH4 A5LIH4



Compact & Flexible
Durable & Excellent

Exquisite appearance excellent performance

The truck has small size and small turning radius which is suitable for working in narrow spaces;
The truck has a light weight and is more suitable for floor work.

Comfortable space and thoughtful operation

The truck has excellent driving space and easy access to operation controls.

Safe and reliable convenient maintenance

Reliable and stable performance makes maintenance easier.

People oriented design concept / inheritance family design concept
seek breakthrough in a appearance / showing dynamic charm in design details

Exquisite Appearance Excellent Performance

The truck has small size and small turning radius which is suitable for working in narrow spaces;
The truck has a light weight and is more suitable for floor work.



The Truck Has Small Turning Radius And Good Passing Performance.

Foldable fork for elevator access is optional.



Front axle drive offers excellent performance.



Comfortable Space And Thoughtful Operation

The truck has excellent driving space and easy access to operation controls.

Wide view mast design offers wide view.

E Economic
S Energy Saving
Two adjustable driving modes




Card swiping starting is optional configuration for the truck.


The truck has large cab space with spacious legroom and headroom.

Ratchet type hand brake offers powerful operation.

Adjustable steering wheel angle is labor-saving and meets different needs.


Right mounted control valve stem offers easy operation.

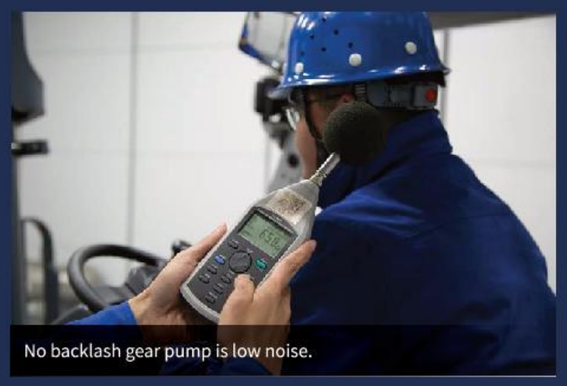
No backlash gear pump is low noise.

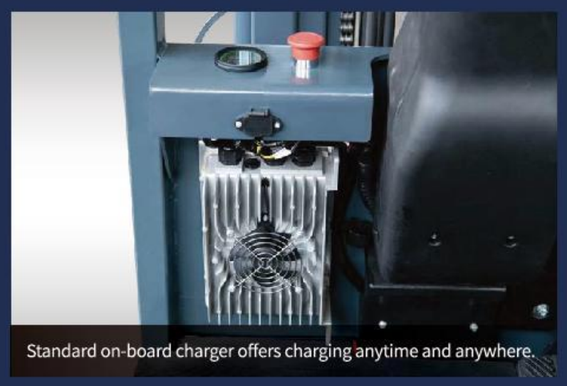
Standard on-board charger offers charging anytime and anywhere.

Safe And Reliable, Convenient Maintenance

Reliable and stable performance makes maintenance easier.



Reliable components

Lights
The entire truck is equipped with a standard LED lighting system, which has high brightness, long service life, and is more energy-efficient.

Mast
High-strength H-shaped channel steel is adopted.


- Mast lowering buffer
- Hydraulic burst protection, forward tilting self-locking protection
- Electrical multiple protection: Short circuit protection, overheat protection, low power protection
- Parking safety reminder
- Slope sliding speed limit control
- Driver Presence Sensing System (Unmanned self-locking intelligent protection)、Operation sequence protection

- Detachable framework offers easy maintenance of electrical components;
- Integrated steering axle is durable;
- The drive motor can be disassembled separately which offers convenient maintenance;
- Common platform for lithium battery trucks and lead acid battery truck which offers high degree of universality of components.


The three electrical systems are mature and reliable.
The truck is adopted with maintenance-free IP54 AC motor, well-known brand electronic control and battery.

Steering axle
High level transverse oil cylinder hydraulic steering axle is adopted.




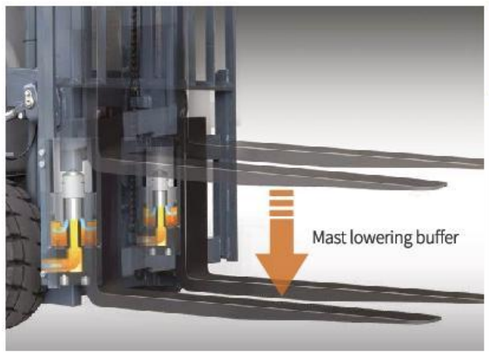



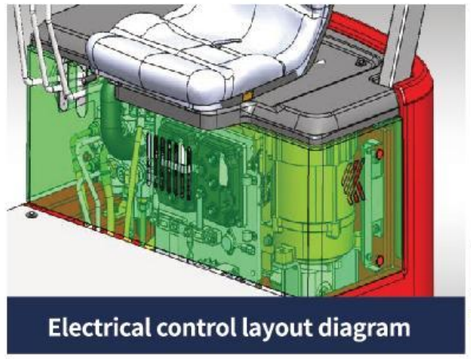


Electrical control layout diagram

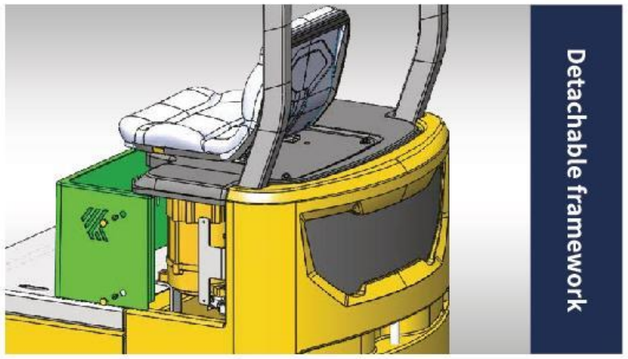


Detachable framework

Manufacturer and Technical Data(Table 1)

	Characteristics											
1.01	Manufacturer			ANHUI HELI CO., LTD.								
1.02	Model			CPD08SQ		CPD10SQ		CPD12SQ		CPD08SQ		CPD10SQ		CPD12SQ	
1.03	Configuration number			A1H4*	A5H4	A1H4*	A5H4	A1H4*	A5H4	A1LIH4*	A5LIH4	A1LIH4*	A5LIH4	A1LIH4*	A5LIH4
1.04	Rated capacity	Q	kg	800		1000		1200		800		1000		1200	
1.05	Load center distance	c	mm	400											
1.06	Power mode			Lead acid Battery						Lithium Battery					
1.07	Driving mode			Seated											
1.08	Front overhang	x	mm	305											
1.09	Wheelbase	y	mm	1150											
	Weight														
2.01	Total weight (with/without battery)		kg	1750/1557		1920/1655		2040/1740		1670/1555		1860/1745		1990/1870	
2.02	Axle load (laden,front/rear)		kg	2210/340		2510/410		2850/390		2110/360		2430/430		2750/440	
2.03	Axle load (unladen,front/rear)		kg	910/840		875/1045		890/1150		800/870		800/1060		810/1180	
	Tyres														
3.01	Tyre type			Solid tyre											
3.02	Tyre size,front			4.00-8											
3.03	Tyre size,rear			3.5-5											
3.04	Wheels,number front/rear (x=driven wheels)			2/2											
3.05	Tread, front	b10	mm	800											
3.06	Tread, rear	b11	mm	258											
	Dimensions														
4.01	Mast tilt angle (forward/backward)	α/β	°	5/7											
4.02	Height (mast lowered)	h1	mm	1975		1975		1975		1975		1975		1975	
4.03	Free lifting height	h2	mm	60											
4.04	Lifting height (standard)	h3	mm	3000											
4.05	Max. height,extended (with backrest)	h4	mm	3800											
4.06	Height of overhead guard	h6	mm	1960											
4.07	Seat height relating to SIP (to ground)	h7	mm	1010											
4.08	Towing coupling height	h10	mm	425											
4.09	Overall length (with fork)	l1	mm	2440		2440		2460		2440		2460		2480	
4.10	Overall length (without fork)	l2	mm	1670		1670		1690		1670		1690		1710	
4.11	Overall width	b1	mm	900											
4.12	Fork size:thickness x width x length	s/e/l	mm	30×80×770											
4.13	Fork carriage,according to ISO2328			2A											
4.14	Distance across fork-arms, Max./Min.	b5	mm	800/180											
4.15	Ground clearance (at mast)	m1	mm	65											
4.16	Ground clearance (center of wheelbase)	m2	mm	65											
4.17	Right angle stacking aisle width for pallet 800 x800mm	Ast	mm	2785		2785		2797		2785		2797		2813	
4.18	Right angle stacking aisle width for pallet 1000 x1000mm	Ast	mm	2985		2985		2997		2985		2997		3013	
4.19	Min. outside turning radius	Wa	mm	1480		1480		1492		1480		1492		1508	
	Performance Data														
5.01	Travel speed (laden/unladen)		km/h	10/12											
5.02	Lift speed (laden/unladen)		mm/s	250/380		240/380		230/380		250/380		240/380		230/380	
5.03	Lowering speed (laden/unladen)		mm/s	400/330											
5.04	Max.drawbar pull (laden/unladen)		N	3300/3800											
5.05	Max.gradeability (laden/unladen)		%	13/15		12/15		10/15		13/15		12/15		10/15	
5.06	Acceleration time(10 m)(laden/unladen)		s	6.7/6											
	Battery														
6.01	Battery voltage/Capacity (K5)		V/Ah	24/240		24/360		24/420		24/250		24/250		24/280	
6.02	Battery weight		kg	193		265		300		115		115		120	
	Motor and controller														
7.01	Driving motor powering (S2-60min)		kW	3.0											
7.02	Lifting motor powering (S3-15%)			4.5											
7.03	Driving motor controlling mode			MOSFET/AC											
7.04	Lifting motor controlling mode			MOSFET/AC											
	Addition data														
8.01	Service brake/Parking brake		Mpa	Hydraulic/Mechanical											
8.02	Operating pressure for attachments			14.5											

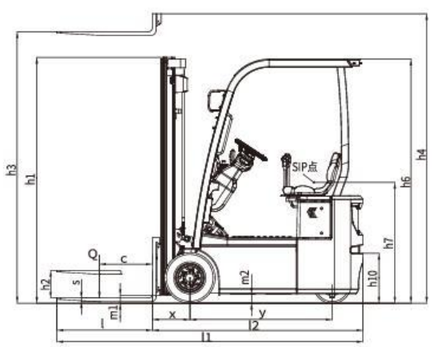

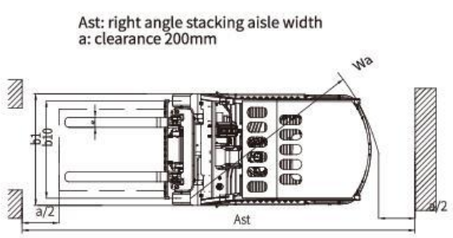

Lead acid Battery 、Charger

Voltage/Capacity(V/Ah)	24/240	24/300	24/360	24/420	24/480
CPD08SQ	●	○	-	-	-
CPD10SQ	-	-	●	○	○
CPD12SQ	-	-	-	●	○
On-board charger	E24V35A-13C22		E24V50A-13C22		

Note: "●"standard ; "○"optional ; "—" non-configurable.

Lithium battery、Charger

Lithium Battery brand	HELI				EIKTO			CATL		
Voltage/Capacity(V/Ah)	24/250	24/280	24/300	24/404	24/270	24/300	24/350	24/228	24/302	24/346
CPD08SQ	●	○	○	-	○	○	-	○	○	-
CPD10SQ	●	○	○	-	○	○	-	○	○	-
CPD12SQ	○	●	○	○	○	○	○	○	○	○
Low temperature heating of lithium battery pack						●				
On-board charger	E24V50ALI-13C22									


Note: "●"standard ; "○"optional ; "—" non-configurable.

Mast parameters

Mast type	Mast model	Max. lifting height (mm)	Load capacity (lode center 400mm)(kg)			Height (mast lowered) (mm)	Free lift (with backrest) (mm)	Service weight (kg)						Mast tilt angle α/β(°)
								0.8t		1.0t		1.2t		
			0.8t	1.0t	1.2t	0.8-1.2t	0.8-1.2t	Lithium	Lead acid	Lithium	Lead acid	Lithium	Lead acid	
Wide View Standard Mast	M200	2000	800	1000	1200	1475	60	1617	1697	1807	1867	1937	1997	5°/7°
	M250	2500	800	1000	1200	1725	60	1644	1724	1834	1894	1964	2024	5°/7°
	M270	2700	800	1000	1200	1825	60	1654	1734	1844	1904	1974	2034	5°/7°
	M300	3000	800	1000	1200	1975	60	1670	1750	1860	1920	1990	2050	5°/7°
	M330	3300	800	1000	1200	2125	60	1686	1766	1876	1936	2006	2066	5°/7°
	M350	3500	800	1000	1150	2225	60	1696	1776	1886	1946	2016	2076	5°/7°
	M370	3700	750	900	1000	2325	60	1707	1787	1897	1957	2027	2087	5°/7°
	M400	4000	700	850	900	2525	60	1728	1808	1918	1978	2048	2108	5°/7°
	M425	4250	650	800	850	2675	60	1744	1824	1934	1994	2064	2124	5°/7°
	M450	4500	600	700	750	2825	60	1759	1839	1949	2009	2079	2139	5°/7°
Full Free 3-Stage Wide View Mast	ZSM360	3600	700	800	900	1695	820	1717	1797	1907	1967	2037	2097	5°/7°
	ZSM370	3700	650	750	850	1725	850	1722	1802	1912	1972	2042	2102	5°/7°
	ZSM400	4000	600	650	750	1825	950	1741	1821	1931	1991	2061	2121	5°/7°
	ZSM435	4350	500	550	650	1955	1080	1765	1845	1955	2015	2085	2145	5°/7°
	ZSM450	4500	400	450	550	2005	1130	1774	1854	1964	2024	2094	2154	5°/7°

Note: **Wide View Full Free 3-Stage Mast:** When there is no backrest, the free lifting height increases by 307.5mm.

Load curve

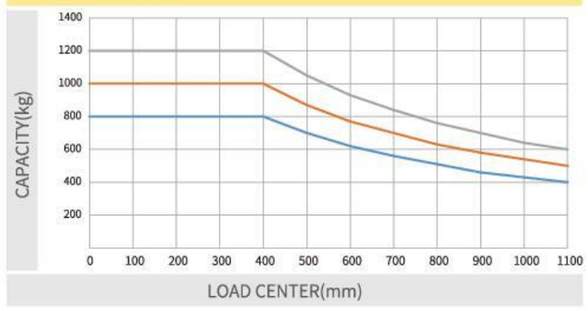

Note:
The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. the standard load means a cubic with 800mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.